

summit

PERFORMANCE PROPERTIES & SPECIFICATIONS

5 mm premium glue down/ looselay vinyl plank

Thickness	0.2" (5 mm)
Size	7.25" W x 48" L
Wear Layer	20 mil (0.5 mm)
Finish	Antique handscraped or wood grain embossed
Edges	Beveled
Sq. Ft / Carton	24.16
Pieces / Carton	10
Carton Weight	51.15 lbs
Cartons / Pallet	50
Pallet / Container	16
Installation	Premium glue down/ looselay
Warranty	Limited Lifetime residential warranty Limited 17 year commercial warranty

Other Performance

Acoustics - IIC: 67

Dimensional Stability after Heat Exposure: EN ISO 23999:2012 –

Variations of X direction: -0.02%, Variation of Y direction: -0.10%

Peel Resistance: EN ISO 24345:2012 – X direction: 110 N/50 mm,

Y direction: 95 N/50 mm

Slip Resistance: EN 14041:2004/AC:2006 – Dynamic coefficient of friction: 0.39; Technical class DS

Thermal Conductivity: EN 12667:2007 – 0.0811 W/m*K



www.novusfloors.com

summit

PERFORMANCE PROPERTIES & SPECIFICATIONS

5 mm premium glue down/ looselay vinyl plank

Presence of Key Chemicals

Formaldehyde Emission: EN 14041:2004/AC:2006 – Not detected (MDL 0.080 mg/m³), Class E1 (≤ 0.124 mg/m³)

Phthalates: ASTM D3421 – Not detected (MDL 0.003%)

Antimony: ASTM F963-11 – Not detected (MDL 5 mg/kg)

Arsenic: ASTM F963-11 – Not detected (MDL 2.5 mg/kg)

Barium: ASTM F963-11 – Not detected (MDL 10 mg/kg)

Cadmium: ASTM F963-11 – Not detected (MDL 5 mg/kg)


Chromium: ASTM F963-11 – Not detected (MDL 5 mg/kg)

Lead: ASTM F963-11 – Not detected (MDL 5 mg/kg)

Mercury: ASTM F963-11 – Not detected (MDL 5 mg/kg)

Selenium: ASTM F963-11 – Not detected (MDL 10 mg/kg)

PCP: EN 14041:2004/AC:2006 – Not detected (MDL 5.0 mg/kg)

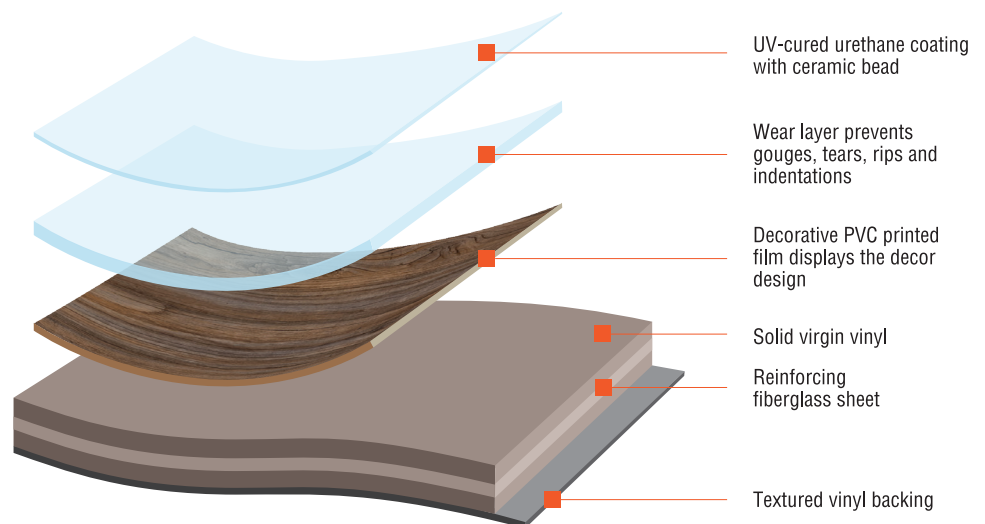

www.novusfloors.com